

ZERO

Sıva Altı Armatürler / Recessed Luminaires



Polyester elektrostatik toz boyalı gövde /
Electrostatic polyester powder coated

Yüksek geçirgenlikli satine PMMA veya PS opal difüzör /
High diffusion and transmission satin opal PMMA or PS diffuser

Mikroprizmatik lens opsiyonu / Microprismatic lens option (UGR<19)

Tunable White Renk Seçeneği / Tunable White Option

Homojen aydınlatma / Uniform illumination

MacAdam 3 LED renk toleransı /
Colour tolerance MacAdam 3

Tunable White, DALI, SwitchDIM ve Acil seçenekleri /
Tunable White, DALI, SwitchDIM and Emergency options


Özellikler / Specifications




Renk Seçenekleri / Colour Options




Fotometrik Bilgi / Photometric Data



Tavan Bilgi / Ceiling Data



Teknik Çizim / Technical Drawing

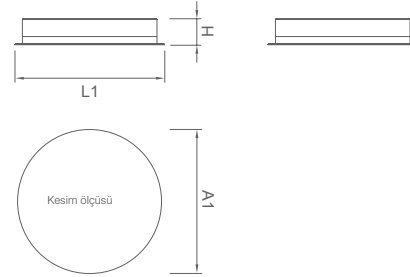

Teknik Bilgi / Technical Data

Güç (W)	Çıkış / Output Lumen (lm)	Verimlilik (lm/W)	CRI (Ra)	Renk Sıcaklığı Colour Temp. (K)	Ölçüler / Dimensions (mm)					Ağırlık Weight (kg)	Ürün Kodu Item Code
					A1	A2	L1	L2	H		
24W	2640	120	>80	4000K	300	-	325	-	75	2,2	181 3 032423024
30W	3300	117	>80	4000K	385	-	405	-	75	2,9	181 3 040423030
36W	3850	115	>80	4000K	425	-	450	-	75	4,1	181 3 045423036

Ek Kod / Suffix Code

- (100) 1 saat Acil çıkış kiti / 1 hour Emergency gear
- (010) DALI