

ZERO

Sıva Üstü Armatürler / Surface Mounted Luminaires



Polyester elektrostatik toz boyalı gövde /
Electrostatic polyester powder coated

Yüksek geçirgenlikli satine PMMA veya PS opal difüzör /
High diffusion and transmission satin opal PMMA or PS diffuser

Mikroprizmatik lens opsiyonu / Microprismatic lens option (UGR<19)

Tunable White Renk Seçeneği / Tunable White Option

Homojen aydınlatma / Uniform illumination

MacAdam 3 LED renk toleransı /
Colour tolerance MacAdam 3

Tunable White, DALI, SwitchDIM ve Acil seçenekleri /
Tunable White, DALI, SwitchDIM and Emergency options


Özellikler / Specifications




Renk Seçenekleri / Colour Options




Fotometrik Bilgi / Photometric Data



Tavan Bilgi / Ceiling Data



Teknik Çizim / Technical Drawing

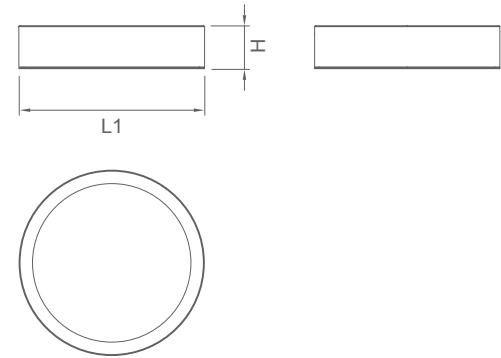

Teknik Bilgi / Technical Data

Güç (W)	Çıkış / Output Lumen (lm)	Verimlilik (lm/W)	CRI (Ra)	Renk Sıcaklığı (K)	Ölçüler / Dimensions (mm)	Ağırlık (kg)	Ürün Kodu (Item Code)
					A1 A2 L1 L2 H		
24W	2520	105	>80	3000K	- - 405 - 95	3,1	182 3 040323024
24W	2640	110	>80	4000K	- - 405 - 95	3,1	182 3 040423024
36W	3670	101	>80	3000K	- - 405 - 95	3,1	182 3 040323036
36W	3850	106	>80	4000K	- - 405 - 95	3,1	182 3 040423036

Ek Kod / Suffix Code

- (100) 1 saat Acil çıkış kiti / 1 hour Emergency gear
- (010) DALI